

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C10G 9/20	A1	(11) International Publication Number: WO 95/32263 (43) International Publication Date: 30 November 1995 (30.11.95)
(21) International Application Number: PCT/US95/06504 (22) International Filing Date: 22 May 1995 (22.05.95) (30) Priority Data: 08/248,337 24 May 1994 (24.05.94) US (71) Applicants: ABB LUMMUS GLOBAL INC. [US/US]; 1515 Broad Street, Bloomfield, NJ 07003 (US). SCHMIDT'SCHE HEISSDAMPF-GESELLSCHAFT MBH [DE/DE]; Ellenbacher Strasse 10, D-34123 Kassel-Bettenhausen (DE). (72) Inventors: ALBANO, John, Vincent; 768 Glenside Court East, Oradell, NJ 07649 (US). SUNDARAM, Kandasamy, Meenakshi; 157-H Meriline Avenue, West Paterson, NJ 07424 (US). HERRMANN, Hellmut, Adam; Feerenstrasse 36, D-34121 Kassel (DE). (74) Agents: BERNIEKE, Richard, H. et al.; Chilton, Alix & Van Kirk, 750 Main Street, Hartford, Connecticut 06103-2708 (US).		(81) Designated States: CN, DE, JP, KR, RU, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <div data-bbox="1149 766 1429 913" style="border: 1px solid black; padding: 5px; text-align: center;">РОССИЙСКАЯ ГОСУДАРСТВЕННАЯ БИБЛИОТЕКА</div>
(54) Title: QUENCH COOLER (57) Abstract A quench cooler or transferline heat exchanger for quenching the effluent from a cracking furnace has an inlet coupling between the cracking furnace tubes and the tubes of the quench cooler which splits the flow into a plurality of branches. The flow passages are configured to initially decelerate and then reaccelerate the gas. This involves a conical diverging diffuser section and then a tapered and branched converging section. The cross sectional transitions are smooth to avoid dead spaces and minimize pressure loss.		

QUENCH COOLER

BACKGROUND OF THE INVENTION

This invention relates to a novel heat exchanger or quench cooler for quenching the effluent from a hydrocarbon cracking furnace. More particularly, the invention relates to the coupling between the cracking furnace tubes and the tubes of the quench cooler or transferline exchanger.

In the production of light olefins (ethylene, propylene, butadiene and butylenes) and associated aromatics (benzene, toluene, ethylbenzene, xylenes and styrene) by the thermal cracking of hydrocarbon feedstocks in the presence of steam, the cracking reactions are stopped by rapidly cooling or quenching the cracking furnace effluent. The quenching time is measured in milliseconds and has the purpose of "freezing" the furnace outlet composition at its momentary value to prevent degradation of the olefin yield through continuing secondary reactions. A number of different quench cooler designs are available in the marketplace depending upon the quantity of cracked gas to be cooled, the fouling tendencies of the furnace effluent and the pressure/temperature conditions of the steam to be generated. These designs range from conventional fixed tubesheet shell and tube heat exchangers to double pipe designs.

It is well known that for any given cracking furnace operating conditions, the yield of olefins can be maximized and quencher fouling minimized by decreasing the temperature of the gas leaving the cracking furnace as rapidly as possible. This requires that the quench cooler be positioned as close as possible to the cracking furnace outlet, that the volume of the inlet section of the quench cooler be minimized and that the surface to volume ratio in the cooling section be maximized. The latter requirement implies that a multiplicity of small quencher tubes are more favorable than a single large diameter arrangement.

One prior art type of quench cooler known as the SHG transferline exchanger (Schmidt'sche Heissdampf - Gesellschaft mbH) uses a multiplicity of double tube arrangements in parallel wherein each quench tube is surrounded by a concentric outer tube which carries the water-steam mixture. The annuli between the inner and outer tubes are supplied with boiler water through horizontal, oval-shaped headers. In this regard, see German Patentschrift DE

2551195. Another prior art patent which uses this double tube arrangement with an oval header for the outside tubes is U.S. Patent 4,457,364. This patent discloses a distributor having an inlet for the gas from the furnace and two or three diverging branches forming a wye or tri-piece for the transition between the furnace and the quench cooler. As indicated, this transition where cooling has not yet begun can be critical in minimizing continued reaction and undesirable coke deposits. In this U.S. Patent 4,457,364, the cross sectional area for flow through the connector is substantially uniform to achieve substantially constant gas velocity throughout the distributor. The distributor may also be divergent in cross sectional area up to the point where the ratio of the sum of the cross sectional areas of the branches to the cross sectional area of the inlet is 2:1.

SUMMARY OF THE INVENTION

The inlet section or connector for a quench cooler between the furnace outlet and the inlets to the quench cooler tubes splits the flow into a plurality of branches and is designed to reduce the inlet section residence time to a minimum. In order to uniformly distribute the gas to a plurality of in-line arranged quench tubes, the flow passages are configured to first efficiently decelerate the gas leaving the furnace and then re-accelerate the gas to the quencher cooling tube velocity. More specifically, a conical diverging diffuser section in the connector decelerates the gases and then a tapered and branched converging section re-accelerates the gases as they are fed into the quench cooler tubes. The cross sectional transitions are smooth with monotonic area change in the flow direction (aerodynamic) so that dynamic pressure is recovered, dead spaces, i.e. zones of flow separation, are avoided and the pressure loss is minimal.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a side elevation view of a quench cooler partially in cross-section incorporating the present invention.

Figure 2 is a cross-sectional view of the quench cooler of Figure 1 taken along line 2-2.

Figure 3 is a perspective view of the connection of the tubes to and through the oval header.

Figure 4 is an end view of a portion of the quench cooler of Figure 1 in cross-section.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring to Figure 1, the quench cooler 10 comprises a plurality of double tube heat exchange elements 12 which in turn comprise the inner tubes 14 which carry the cracking furnace effluent gas surrounded by the outer tubes 16. The annulus between the two tubes carries the coolant water/steam mixture. The lower ends of the tubes 14 and 16 are connected to the oval headers 18 while the upper ends are connected to the oval headers 20.

The connection of the tubes to the oval headers is shown in detail in Figure 3. The inner tubes 14 pass completely through the headers while the outer tubes 16 terminate at the header and are open to the inside of the header. Cooling water, which is supplied to the lower headers 18 via the coolant inlet connections 22 and 24, as shown in Figure 1, flows through the lower headers, into the annular space between the tubes and upwardly emptying into the upper headers 20. The coolant, which is now a heated steam/water mixture, flows out from the headers 20 through the outlet connections 26 and 28. The cooled gas which is flowing up through the pipes 14, empties into the upper outlet chamber 30 and is discharged through the outlet 32.

Although other arrangements can be employed, the present invention is illustrated using a 16-tube arrangement which is best seen in Figure 2. This figure shows the two oval headers 18 with eight tube combinations connected to each header. Two water inlet connections on each oval header are also shown at 22, 22a, 24 and 24a. The two headers 18 are joined to each other and joined

to the surrounding plate 34 such as by welding. Around the periphery of the plate 34 is a flange 36 which is for the purpose of mounting the inlet connector to be described hereinafter. The upper oval headers 20 are similarly mounted including a flange 38 for attaching the flange 40 on the upper outlet chamber 30.

5 The quench cooler of the present invention can be applied most advantageously with cracking furnaces (not illustrated) employing a relatively large number of low capacity cracking coils. For example, such a furnace might have twenty four coils each 12 meters (40 feet) in height with each coil formed from four 5 cm (2 in.) internal diameter tubes feeding into a single 10 cm (4 in.)
10 internal diameter outlet tube. The effluent from four such coils can be quenched in a single quench cooler of the present invention. The illustrated embodiment of the invention feeds the effluent from each furnace coil and outlet tube (four furnace inlet tubes) into four quencher tubes. The quench cooler has sixteen quencher tubes so it can handle four furnace coils (sixteen furnace inlet tubes).

15 The inlet chamber 42 at the lower end of the quench cooler comprises a container or tub 44 which forms the pressure boundary. A flange 46 around the edge of the inlet chamber container is attached by bolts 48 to the flange 36. The container is filled with a high temperature refractory material 50 which has the uniquely shaped internal gas passages 52, 54, 56 and 58 of the present invention
20 formed therein. These gas passages are formed by properly placed cores which are then removed after the refractory has set. For example, the cores may be dissolved or burned out of the refractory. Alternately, the gas passages can be formed of a cast or formed metal such as a high nickel chrome alloy, as illustrated at 53 in Figure 4. In that case, the refractory is merely poured
25 around the formed passages.

 In the illustrated embodiment of the present invention, each of the gas passages 52, 54, 56 and 58 is furcated or branched into four branches 60, 62, 64 and 66. Each branch connects to a single quench tube 14. Each gas passage comprises a first diverging conical diffuser portion 68 followed by a converging
30 portion 70 which includes the branches. The conical diverging portion 68 can be seen in the two views shown in Figures 1 and 4. The converging portion is not as easily recognized since that portion begins with a divergence in one plane


(Figure 1) to spread out to the branches but with a convergence in the other plane (Figure 4). The net effect of this combination of a divergence in one plane and a convergence in the other plane is a smooth or monotonic convergence of the flow area. Discontinuities are avoided which would create eddies and coking. Therefore, the gases are first decelerated in the conical diffuser and then re-accelerated back up to the quencher tube velocity. The smooth re-acceleration serves to avoid flow separation thereby minimizing coke formation in dead zones while providing a uniform flow distribution to the individual quencher tubes. As a specific example, the inside diameter of each inlet tube may be 10.16 cm (4 in.) and the inside diameter of the outlet of the diffuser may be 15.24 cm (6 in.) for a ratio of flow area of 2.25. The 15.24 cm (6 in.) maximum diameter then converges down to four (4) tubes of 5.7 cm (2.25 in.) for a ratio of flow area of 0.56.

Since the flow is re-accelerated without dead zones, coke deposition at the entrance to each tube is minimized. Even if coke is deposited in the tubes, deviation from uniform flow distribution is significantly reduced. This is the advantage of using an aerodynamically efficient diverging/converging passage instead of either a conventional transfer line exchanger inlet or a constant area or diverging bifurcation as shown in U.S. Patent 4,457,364. In the latter case, flow separation in the wye or tri-piece and maldistribution to the transfer line exchanger tubes are likely. The result of applying the diverging/converging passage of the present invention is uniform distribution, reduced coking tendencies and consequently improved yields and increased run length.

IN THE CLAIMS:

1. Connecting means for feeding cracked gases from a cracking furnace coil into the heat exchange tubes of a quench cooler, said connecting means containing a plurality of flow passageways and each passageway comprising a
5 diverging conical inlet diffuser passage followed by an outlet section which is furcated into a plurality of individual outlet passages with each of said outlet passages adapted to feed one of said heat exchange tubes, said outlet section having a configuration such that the cross sectional flow area uniformly decreases in the direction of flow thereby forming a generally converging outlet
10 section.
2. Connecting means as recited in claim 1 wherein said outlet section comprises at least four outlet passages.
3. Connecting means as recited in claim 1 wherein said connecting means comprises a ceramic insulating material and said passageways are formed in said
15 ceramic material.
4. Connecting means as recited in claim 3 wherein said passageways in said ceramic material are lined with metal.
5. Connecting means as recited in claim 1 wherein the ratio of the diameter of said inlet passages to the diameter of one of said outlet passages is 2:1.

1 / 3

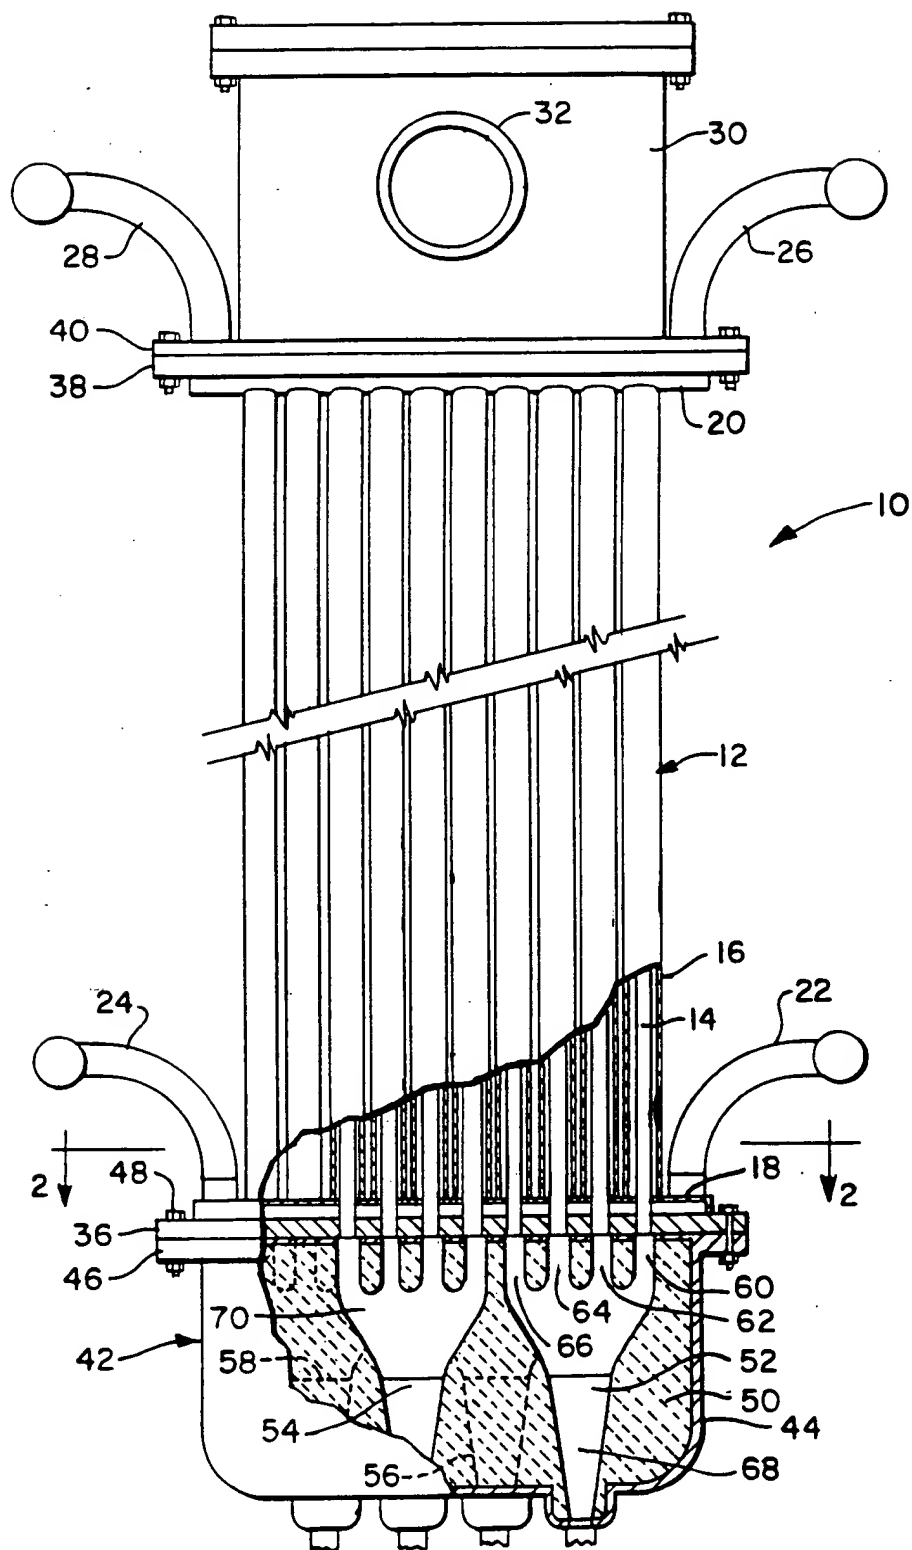FIG. 1

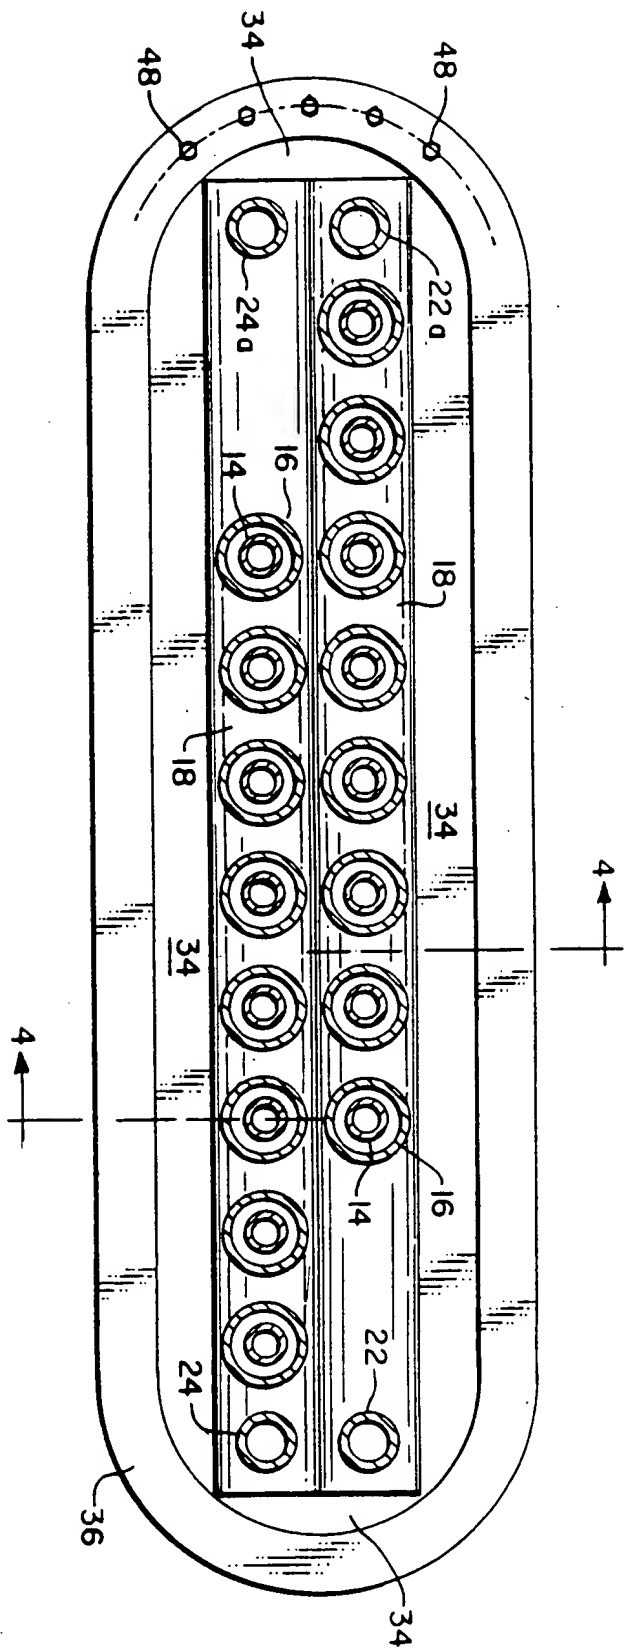


FIG. 2

3 / 3

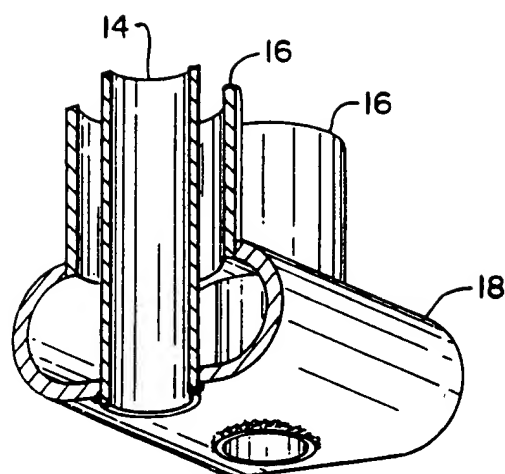


FIG. 3

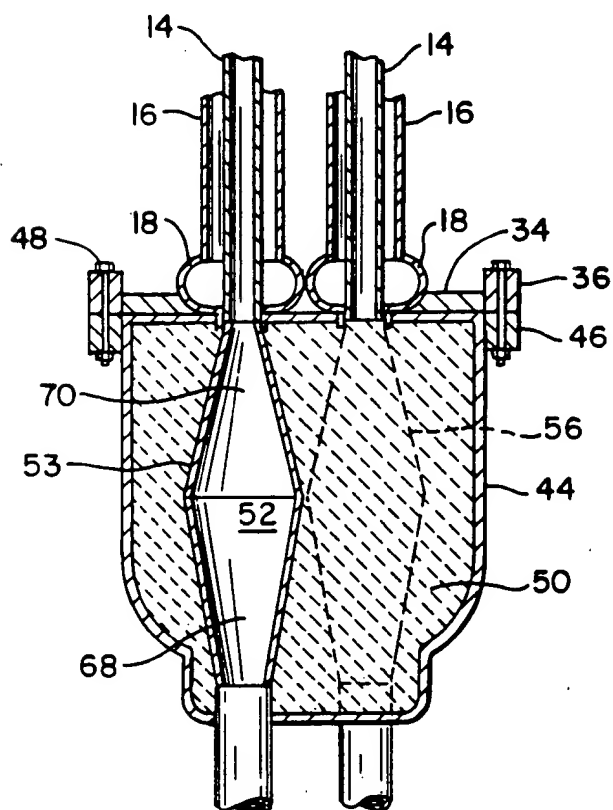


FIG. 4

INTERNATIONAL SEARCH REPORT

In national Application No
PCT/US 95/06504

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 C10G9/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 C10G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	FR,A,2 120 113 (MITSUBISHI JUKOGYO KABUSHIKI KAISHA AND MITSUBISHI PETROCHEMICAL COMP.) 11 August 1972 see claims 1-5; figure 3 ---	1-5
A	EP,A,0 089 742 (EXXON) 28 September 1983 cited in the application ---	
A	FR,A,1 433 702 (BASF) 21 February 1966 see the whole document ---	1-5
A	WO,A,93 04329 (MITSUI ENGINEERING & SHIPBUILDING AND MITSUI PETROCHEMICAL IND.) 4 March 1993 see figure 3 ---	1-5
A	EP,A,0 377 089 (BORSIG) 11 July 1990 see figure 1 -----	1-5

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

24 August 1995

Date of mailing of the international search report

11-09-1995

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+ 31-70) 340-3016

Authorized officer

Michiels, P

INTERNATIONAL SEARCH REPORT

In International Application No
PCT/US 95/06504

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
FR-A-2120113	11-08-72	DE-A-	2163988	20-07-72
		GB-A-	1332426	03-10-73
		NL-A-	7118072	03-07-72
		US-A-	3763262	02-10-73

EP-A-89742	28-09-83	US-A-	4457364	03-07-84
		JP-C-	1731038	29-01-93
		JP-B-	4020035	31-03-92
		JP-A-	58173388	12-10-83

FR-A-1433702	15-06-66	BE-A-	662855	21-10-65
		DE-B-	1220409	
		GB-A-	1095727	
		NL-C-	127315	
		NL-A-	6505055	22-10-65

WO-A-9304329	04-03-93	JP-A-	5052487	02-03-93
		DE-T-	4292695	07-10-93

EP-A-377089	11-07-90	DE-A-	3842727	21-06-90
		JP-A-	2195196	01-08-90
		US-A-	5029637	09-07-91
